

# **TS250 SERIES INSTRUMENT**



Thurman Scale's TS250 Series is an economically priced weight instrument with basic to advanced fuctionality and many customizable features. It is the perfect companion to Thurman's Avenger® floor scale and is highly reliable instrumentation for tank, vessel and hopper applications.

#### PERFORMANCE APPLICATIONS

Due to its versatile features and advanced functions, the TS250 Series is specified in industrial applications such as:

- · Warehousing
- Recycling
- · Freight

- Chemical
- · Manufacturing · Agriculture

#### **SPECIFICATIONS**


1.0" high, 6-digit, green backlit LCD
Black ABS plastic, NEMA 1 rated
Stainless steel, NEMA 4X rated
Zero, Print, Units, Tare, On/Off, B/G Net
b, kg, oz, g, lb-oz or custom
Selectable 0 to 999,999
0.0001 to 50
Up to eight $350\Omega$ cells or $16\ 1000\Omega$ cells
Choice of AC or AC/DC (requires 5 "D" cell batteries)
One 350Ω load cell - 58 hours,
Four 350 $\Omega$ load cells - 33 hours
Desk / Wall mount stand (all models)
COM1 (standard): RS232, RS422, RS485
COM2 (standard): RS232, RS422, RS485
and 20 mA; External DB9 on ABS model
Print, Tare, Gross/Net, Units, Zero
Bluetooth® wireless technology, 4-20 mA module,
Profibus, Ethernet/IP, Ethernet TCP, DeviceNet,
ControlNet, Modbus TCP
NTEP CC# 15-099, MC #AM-6002, ETL

### **SPECIAL FEATURES**

- Tailor your TS250 using customer units, custom ticket formats and programmable RS232 output.
- Battery power option on both ABS and stainless steel models.
- · Accumulation feature eliminates manual tracking.
- · Convert any scale into a counting scale by activating the TS250's piece counting feature.
- · Comes with stainless steel desktop/wall mount swivel bracket.


#### ABS PLASTIC ENCLOSURE

(Stainless steel bracket included — Battery power optional)

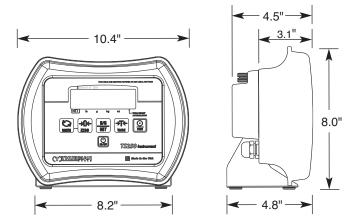

## STAINLESS STEEL ENCLOSURE

(Stainless steel bracket included — Battery power optional)

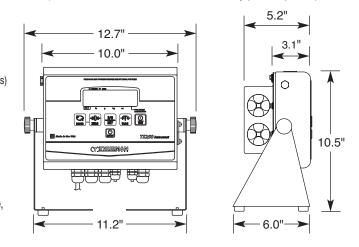

 $At\ A\ Glance^{\scriptscriptstyle{ ext{ iny M}}}$ 

Call toll-free for the Thurman representative nearest you:

(800) 688-9741